


SCHEMATIC

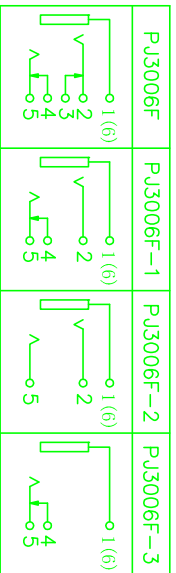

- SPECIFICATION**
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. Life test : 5,000 cycles

| | | | | | |
|-----|-----------------|-----|------------------------|--|------------|
| 9 | HOUSING | 1 | PBT | | |
| 8 | COVER | 1 | PBT | | |
| 7 | AXIS SUPPORT | 1 | PBT | | |
| 6 | AXIS SUPPORT | 1 | BRASS | | Ni-Plating |
| 5 | 5# CONTACT FOOT | 1 | PHOSPHOR BRONZE T=0.3 | | Sn-Plating |
| 4 | 4# CONTACT FOOT | 1 | BRASS T=0.4 | | Sn-Plating |
| 3 | 3# CONTACT FOOT | 1 | BRASS T=0.4 | | Sn-Plating |
| 2 | 2# CONTACT FOOT | 1 | PHOSPHOR BRONZE T=0.25 | | Sn-Plating |
| 1 | 1# CONTACT FOOT | 1 | BRASS T=0.5 | | Sn-Plating |
| NO. | DESCRIPTION | QTY | MATERIAL | | PLATING |

| | | | | | |
|---|---------------|-----------|--------------|-------------|-----|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | OTHERWISE | ±0.30 | | | |
| x | ±0.20 | ±0.10 | | | |
| xxx | ±0.10 | | | | |
| x° | ±3.0° | | | | |
| xx° | ±2.0° | | | | |
| xxx° | ±1.0° | | | | |
| UNIT: MM | TYPE: | MODEL NO: | PAPER NO: A4 | PAGE 1 OF 1 | |
| | EARPHONE JACK | PJ3006F-X | | SCALE | VER |
| DESIGNER BY: | | | | 3:1 | 1 |
| CHECK BY: | | | | | |
| APPROVED BY: | | | | | |

丞永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.