



P.C.B LAYOUT  
TOP VIEW

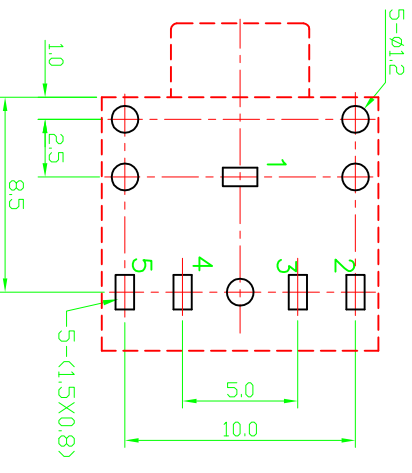

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance :  $\leq 0.03\Omega$
3. Insulation resistance :  $\geq 100M\Omega$  (DC250V)
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

SCHEMATIC

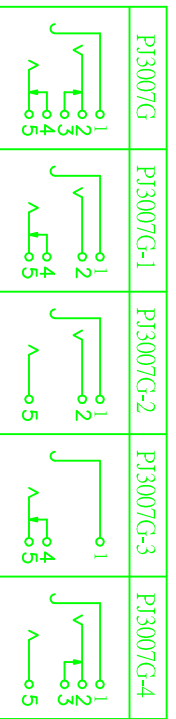

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	SUS301 T=0.2	Sn-Plating
4	4# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating
3	3# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating
2	2# CONTACT FOOT	1	SUS301 T=0.2	Sn-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE T=0.25	Sn-Plating

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		UNIT: MM	TYPE:	MODEL NO:	PAPER NO:	A4	PAGE 1 OF 1
.x	±0.30	PHONE JACK		PJ3007G		SCALE	VER
.xx	±0.20					3:1	1
.xxx	±0.10						
.x°	±3.0°	DESIGNER BY:					
.xx°	±2.0°	CHECK BY:					
.xxx°	±1.0°	APPROVED BY:					