



P.C.B LAYOUT
TOP VIEW

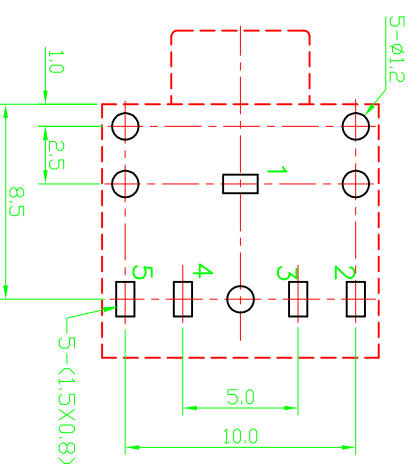

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : $\leq 0.03\Omega$
3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

SCHEMATIC

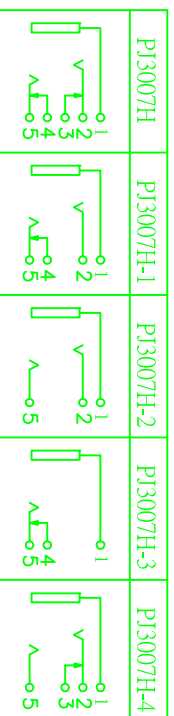

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	AXIS SUPPORT	1	BRASS	Ni-Plating
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	SUS301	Sn-Plating
4	4# CONTACT FOOT	1	BRASS	Sn-Plating
3	3# CONTACT FOOT	1	BRASS	Sn-Plating
2	2# CONTACT FOOT	1	SUS301	Sn-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS
xx	±0.30
xxx	±0.20
xxxx	±0.10
x°	±3.0°
xx°	±2.0°
xxx°	±1.0°

UNIT: MM	TYPE:
	PHONE JACK

DESIGNER BY:	MODEL NO:	PAGE 1 OF 1
CHECK BY:	PJ3007H-X	SCALE
APPROVED BY:	PAPER NO: A4	VER
		3:1
		1