
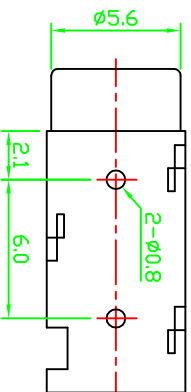


SCHMATIC



- SPECIFICATION**
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. Life test : 5,000 cycles

**P.C.B LAYOUT
TOP VIEW**

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	UNIT: MM
X	±0.30
.XX	±0.20
.XXX	±0.10
.X°	±3.0°
.XX°	±2.0°
.XXX°	±1.0°

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	AXIS SUPPORT	1	BRASS	Ni-Plating
4	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
3	2#CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
2	1#CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
1	HOUSING	1	PA66	

DESIGNER BY:	PHONE JACK	MODEL NO:	PJ3020F-X	PAPER NO:	A4	PAGE 1 OF 1
CHECK BY:						SCALE
APPROVED BY:						3:1
						VER
						1

丞永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.